Scary Pictures

NING
FACE
Y BE
OT

Smith

Cast Iron

Steam Boiler

09860
Certified by
BOSAL Nederland B.V.
M.A.W.P. water: 80 psi
Maximum Water temp: 200° F
Heating Surface: 33.58
Heating Surface: 3.00
Minimum Relief Valve Cap
Manufacturer's Serial No: 20

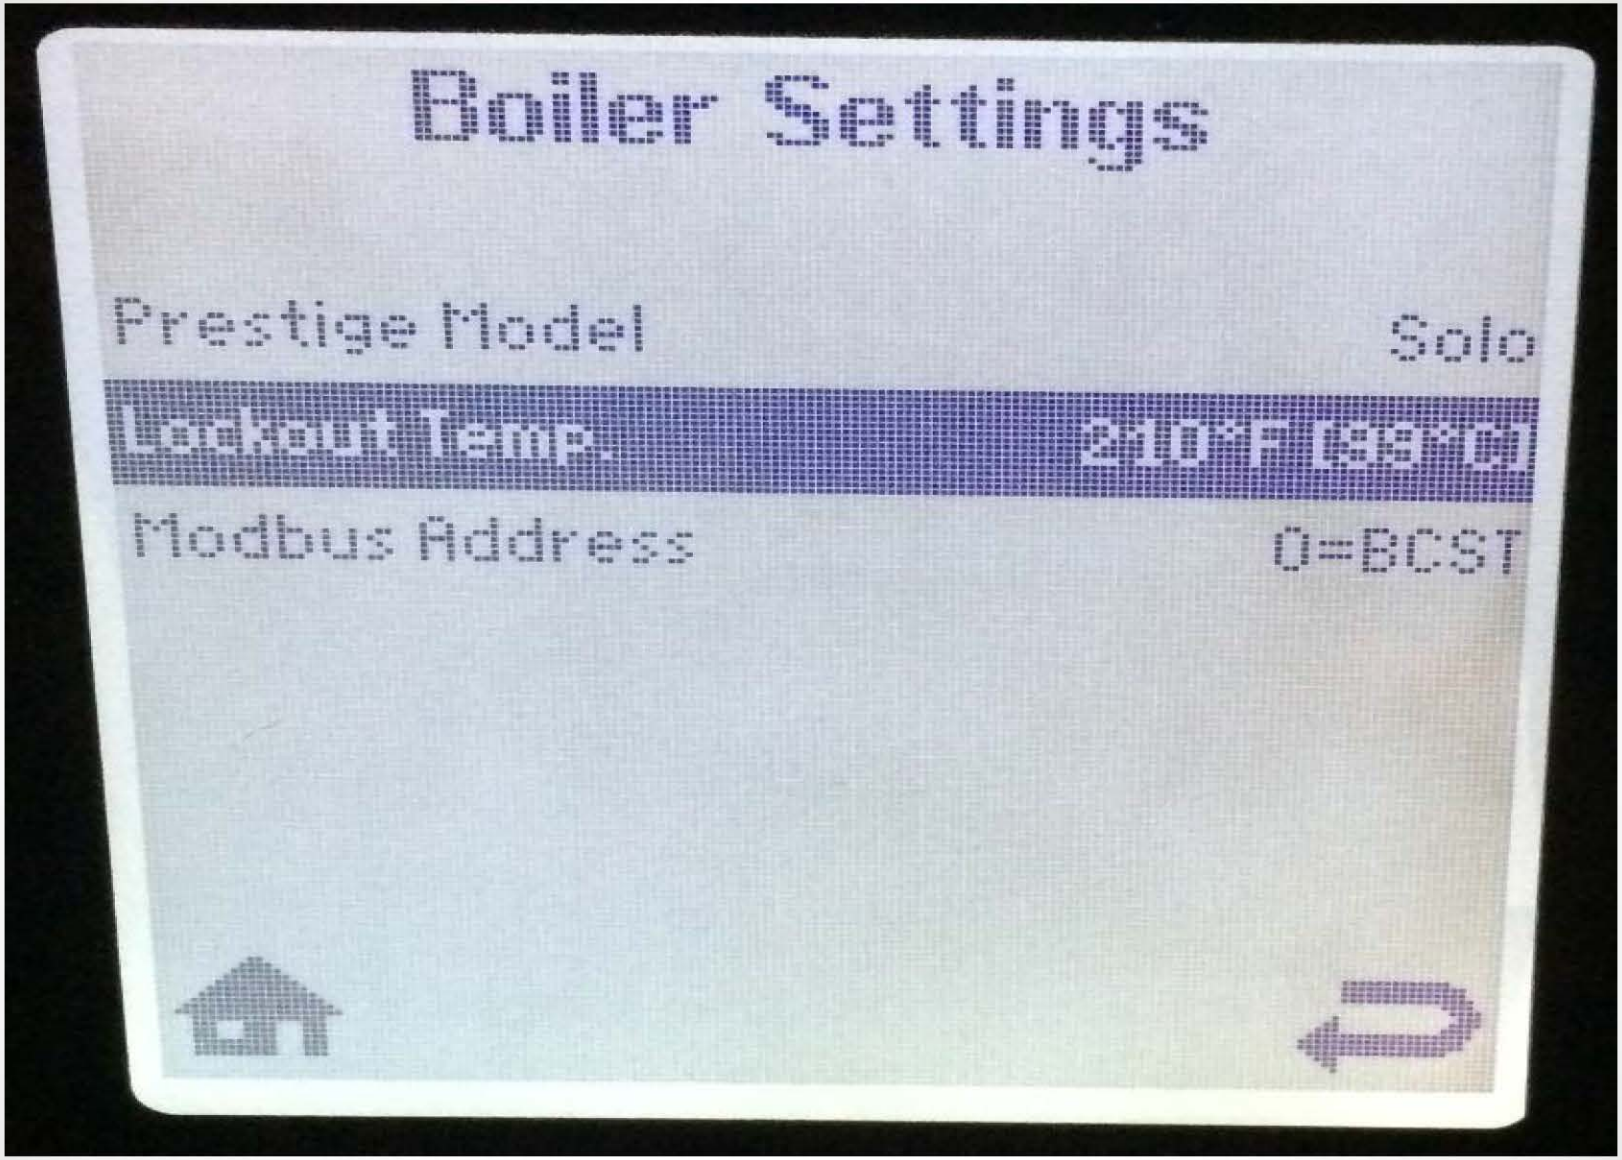
Boiler Settings
Prestige Model
Solo
Modbus Address
0=BCST

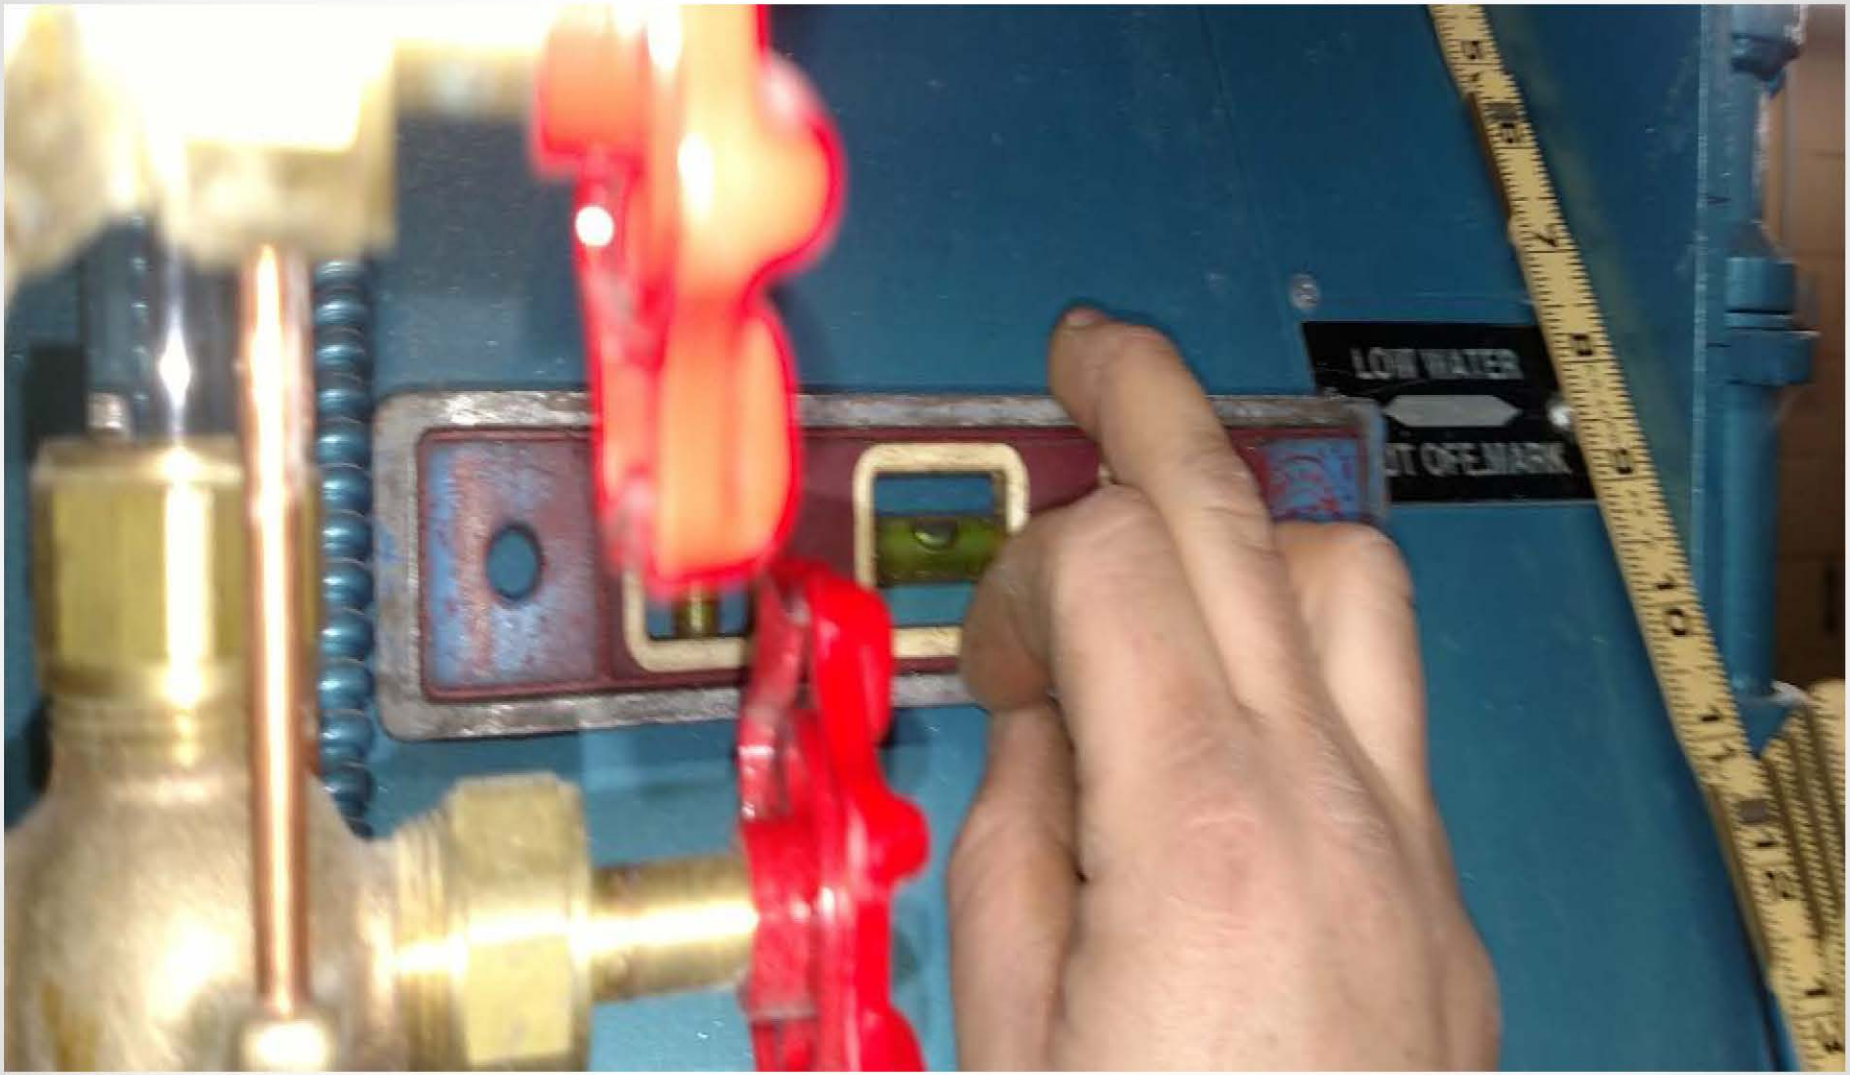
LOW WATER

Original Piping

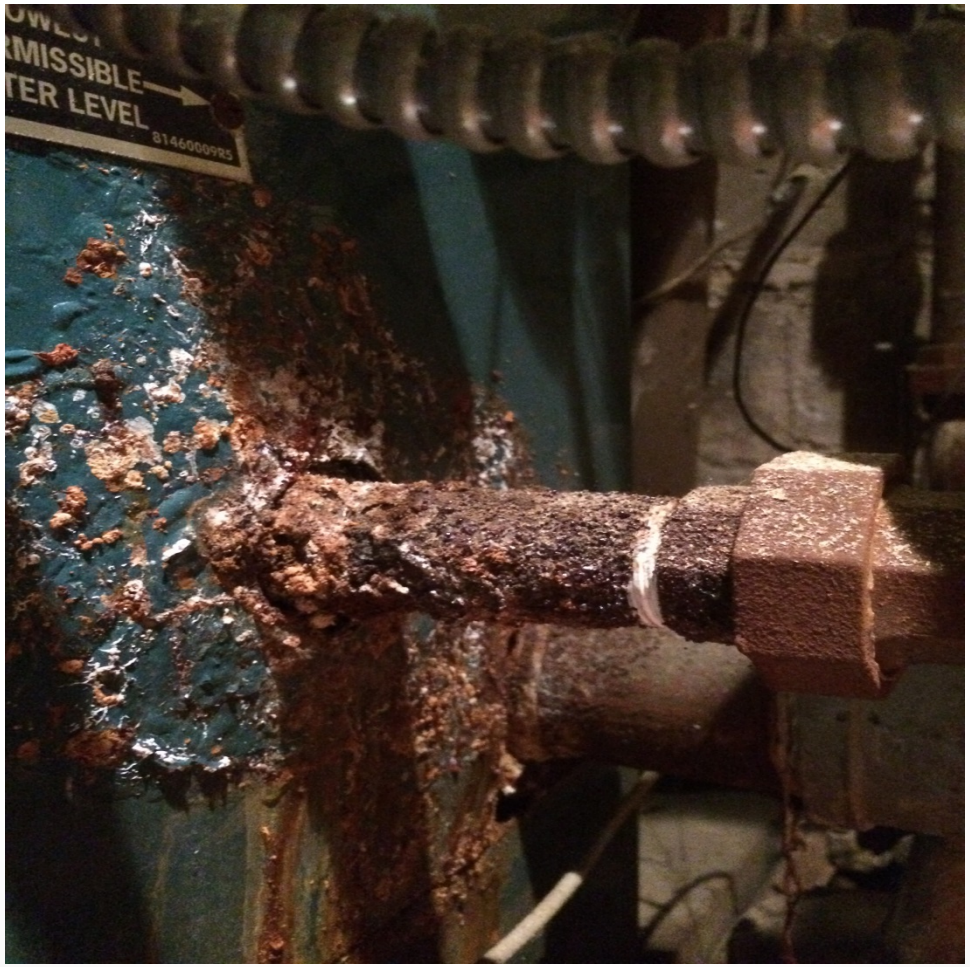

Original Piping

Original Piping

Original Piping

Original Piping

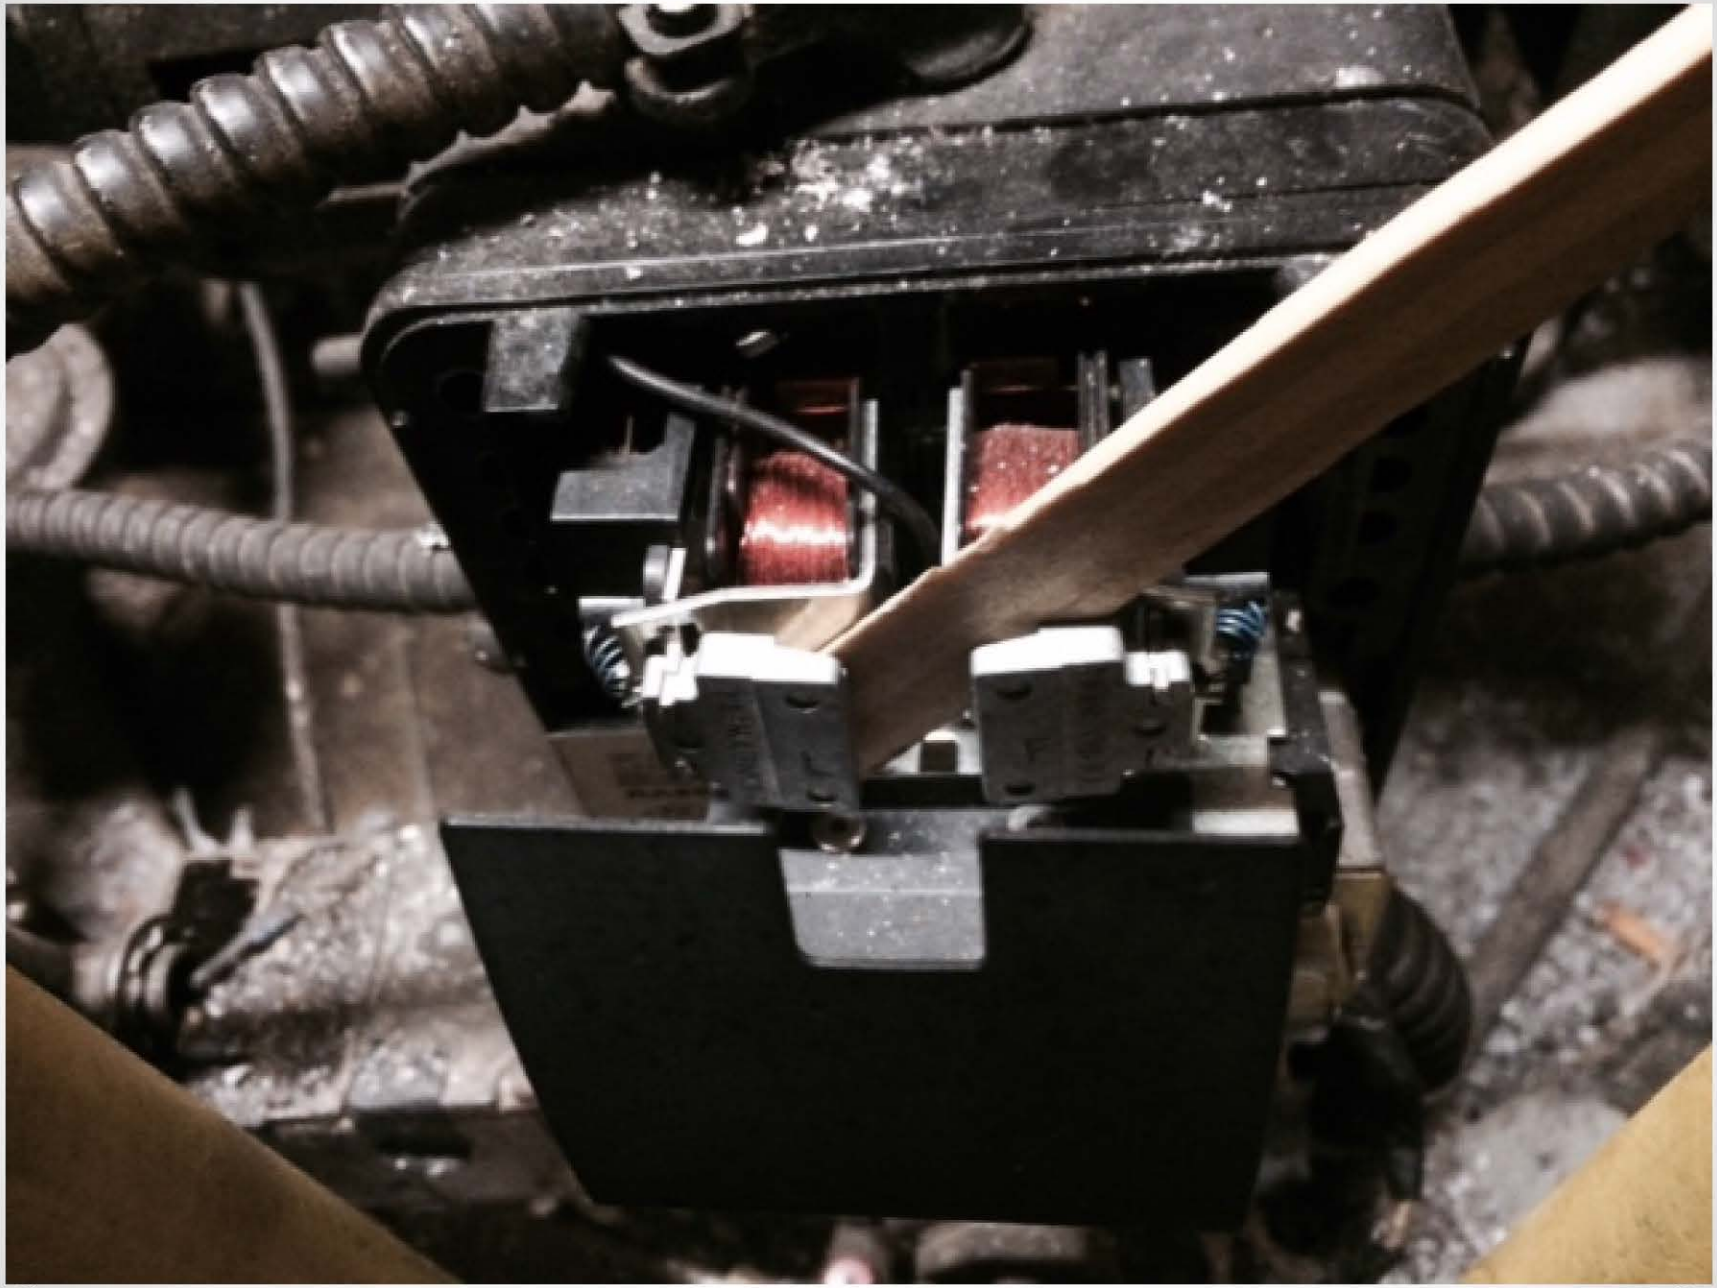

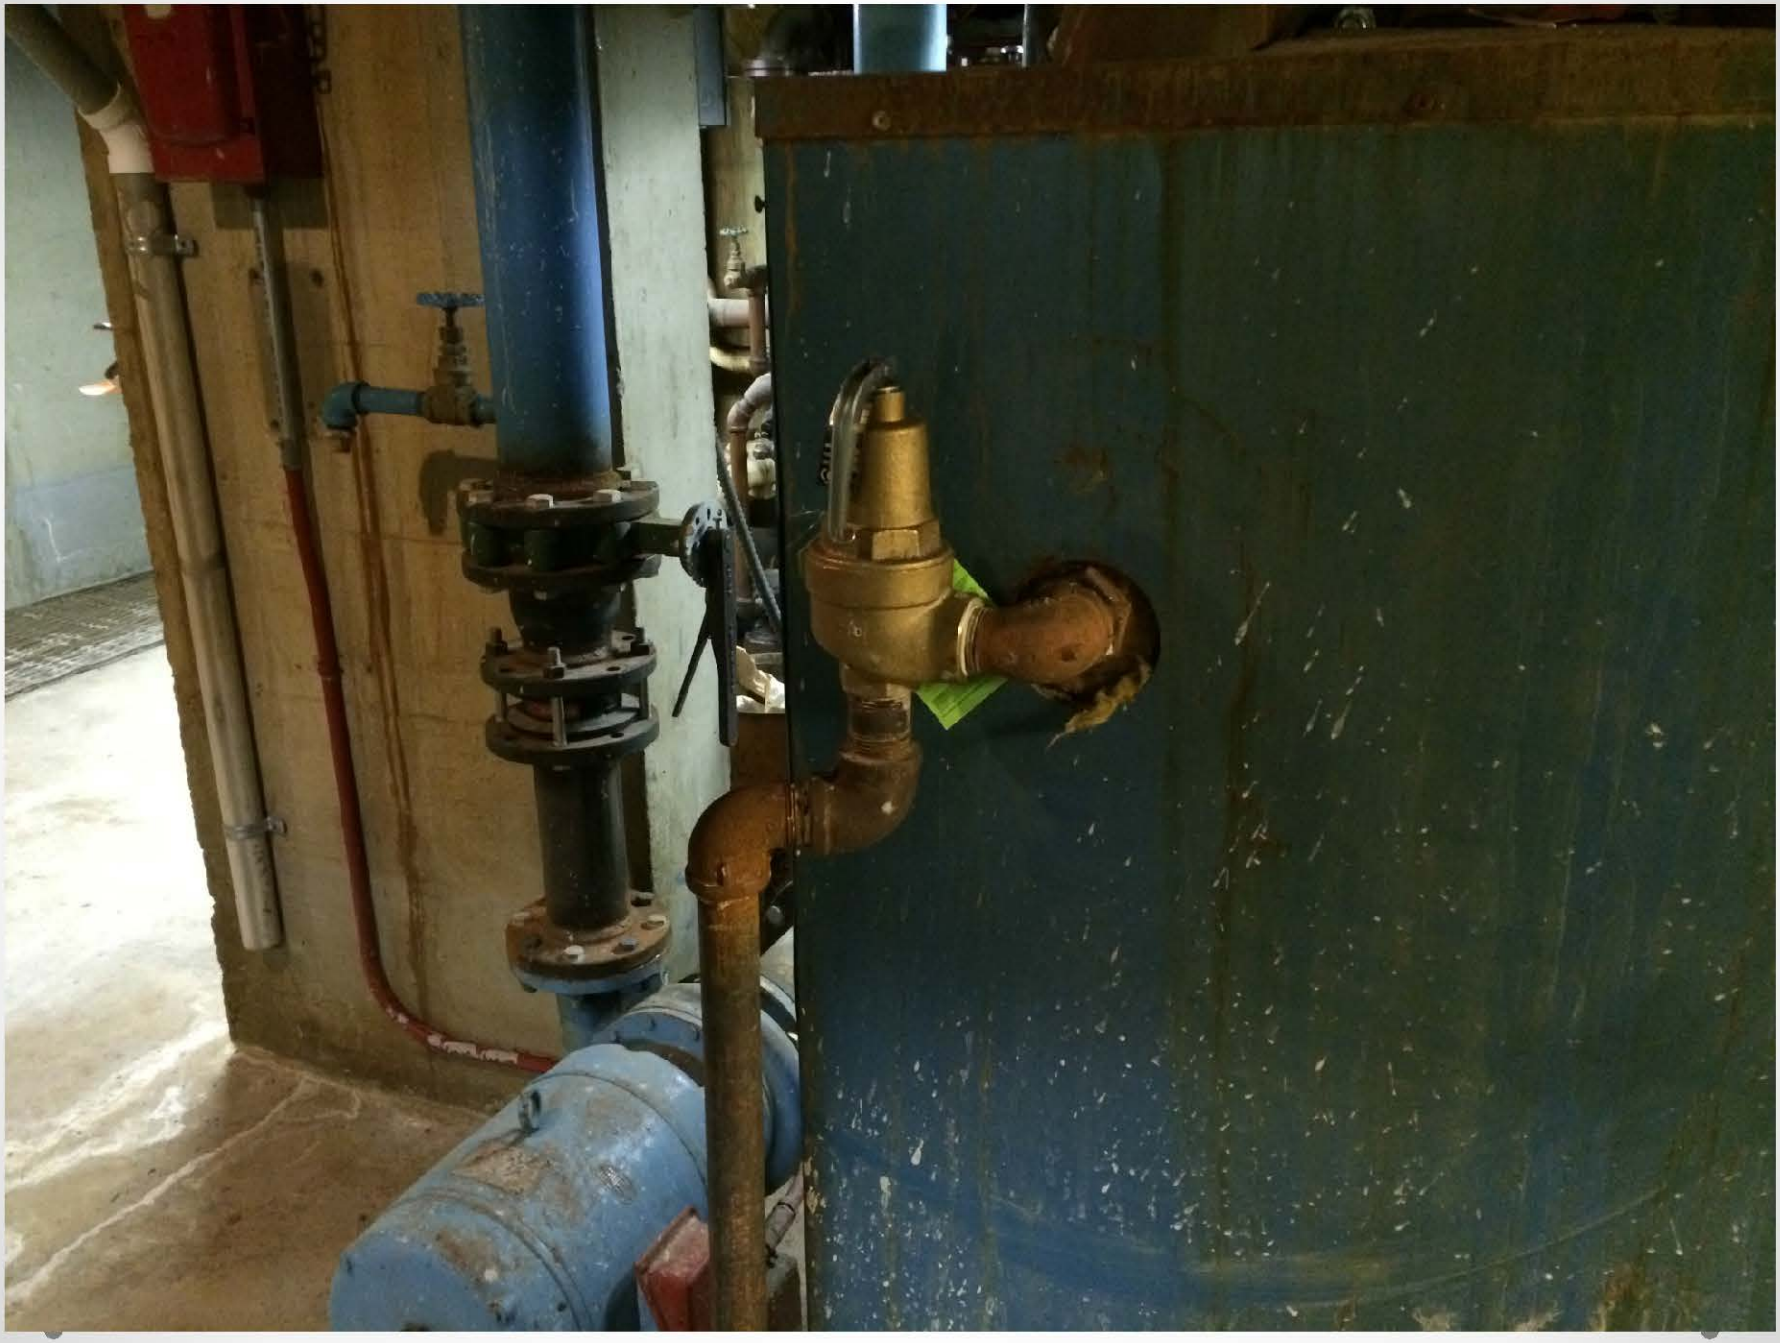

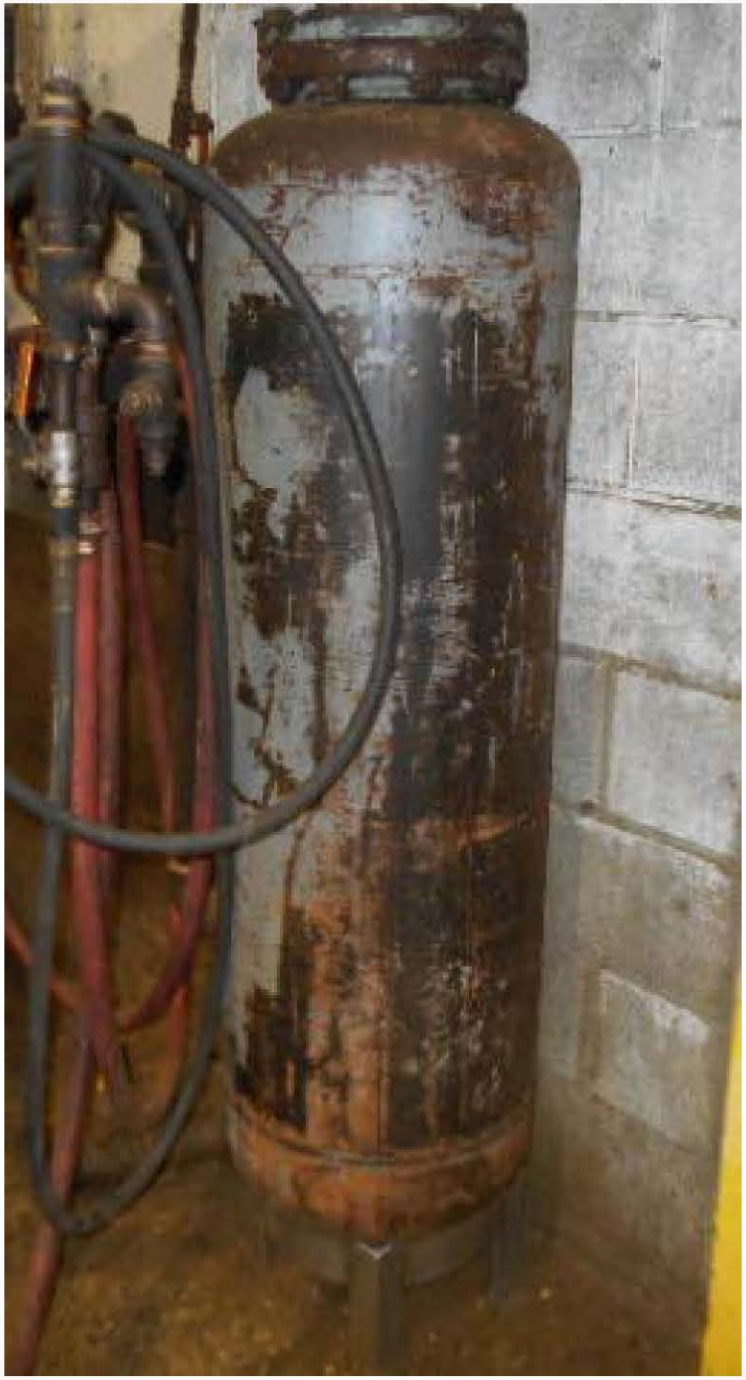

Year built 2015 CO2408
Nr. 01531793 4

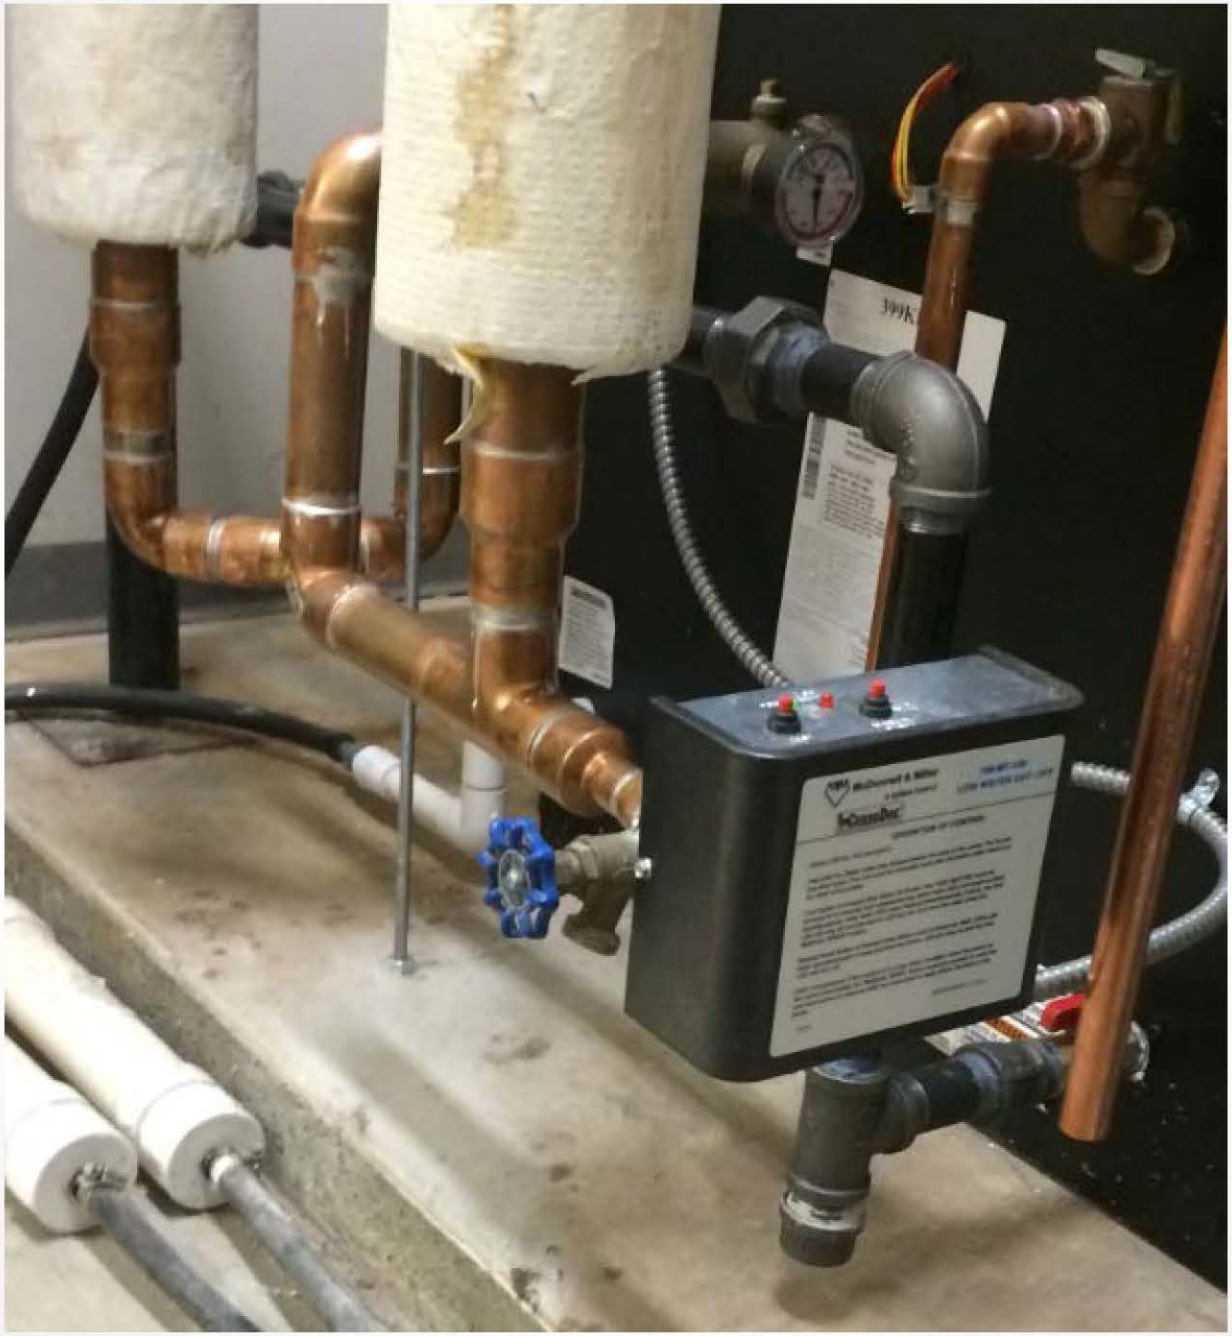

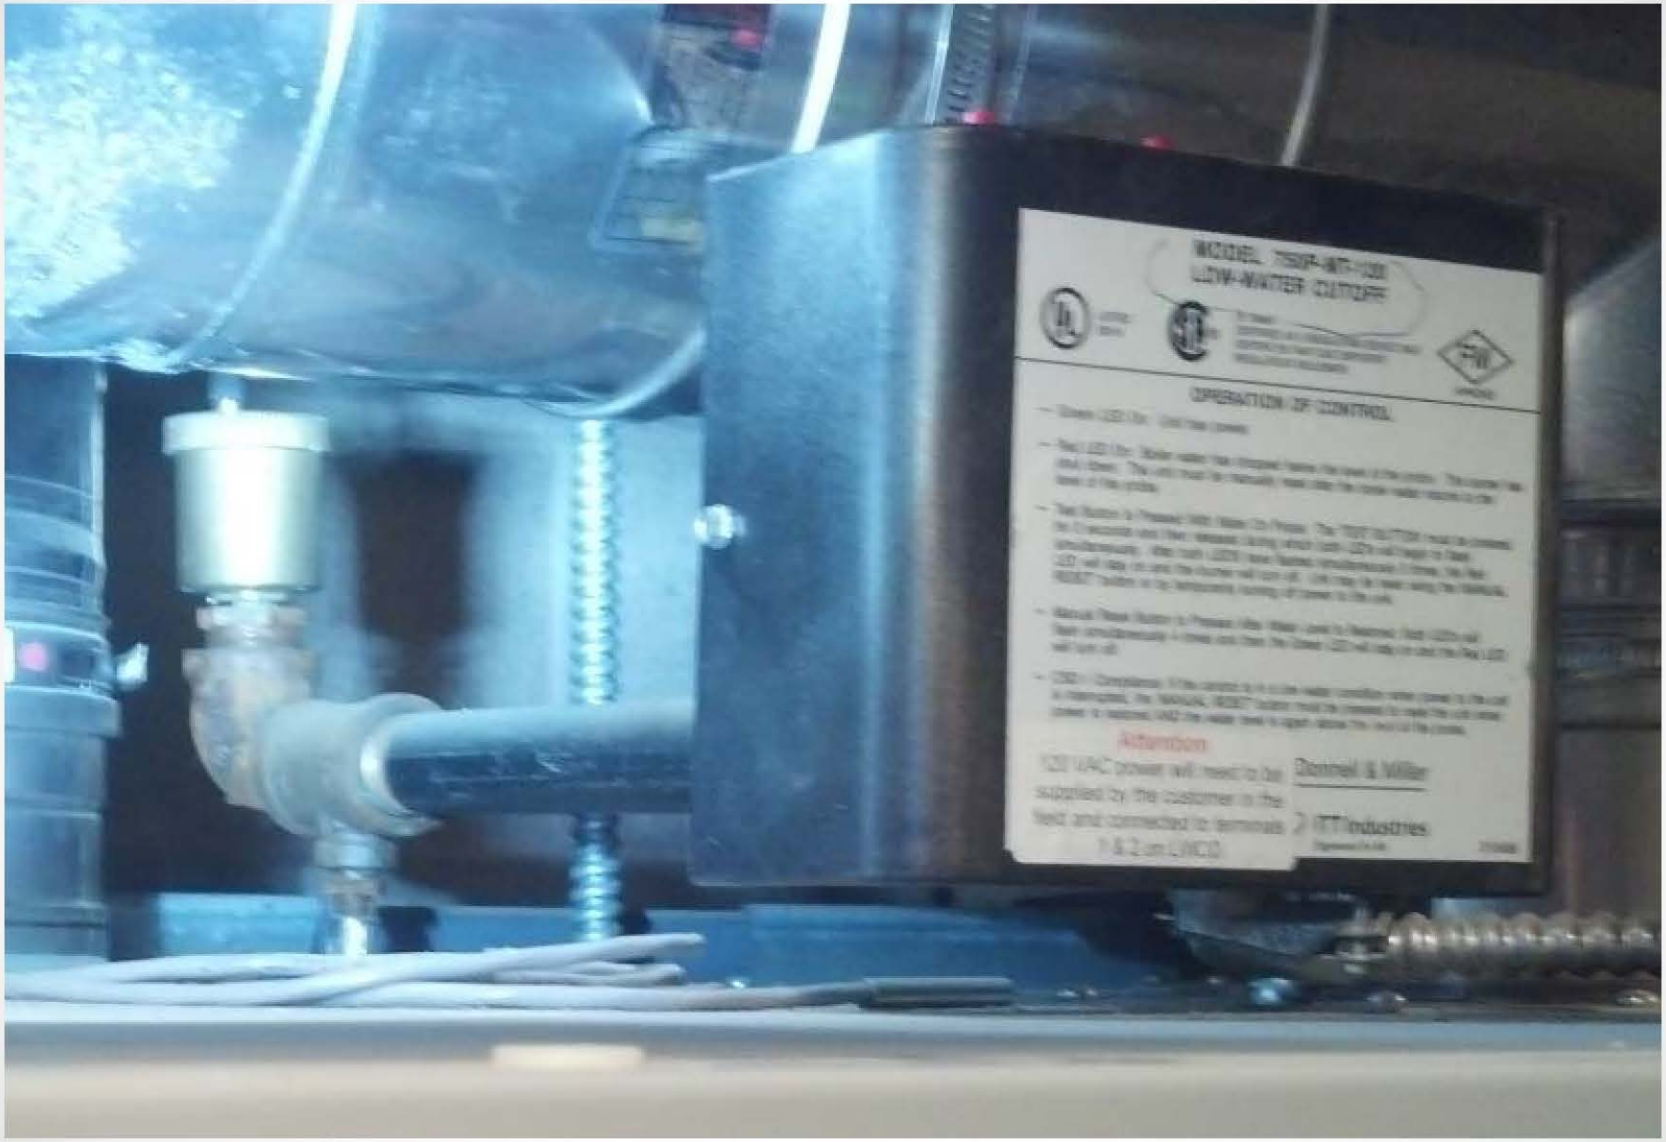
LOW-WATER CUTOFF
OPERATION OF CONTROL
Attention
Dennell & Miller
ITT Industries

psi
AMERICAN
IDEAL
KEEP TUBES
CLEAN
IDEAL WATER TUBE

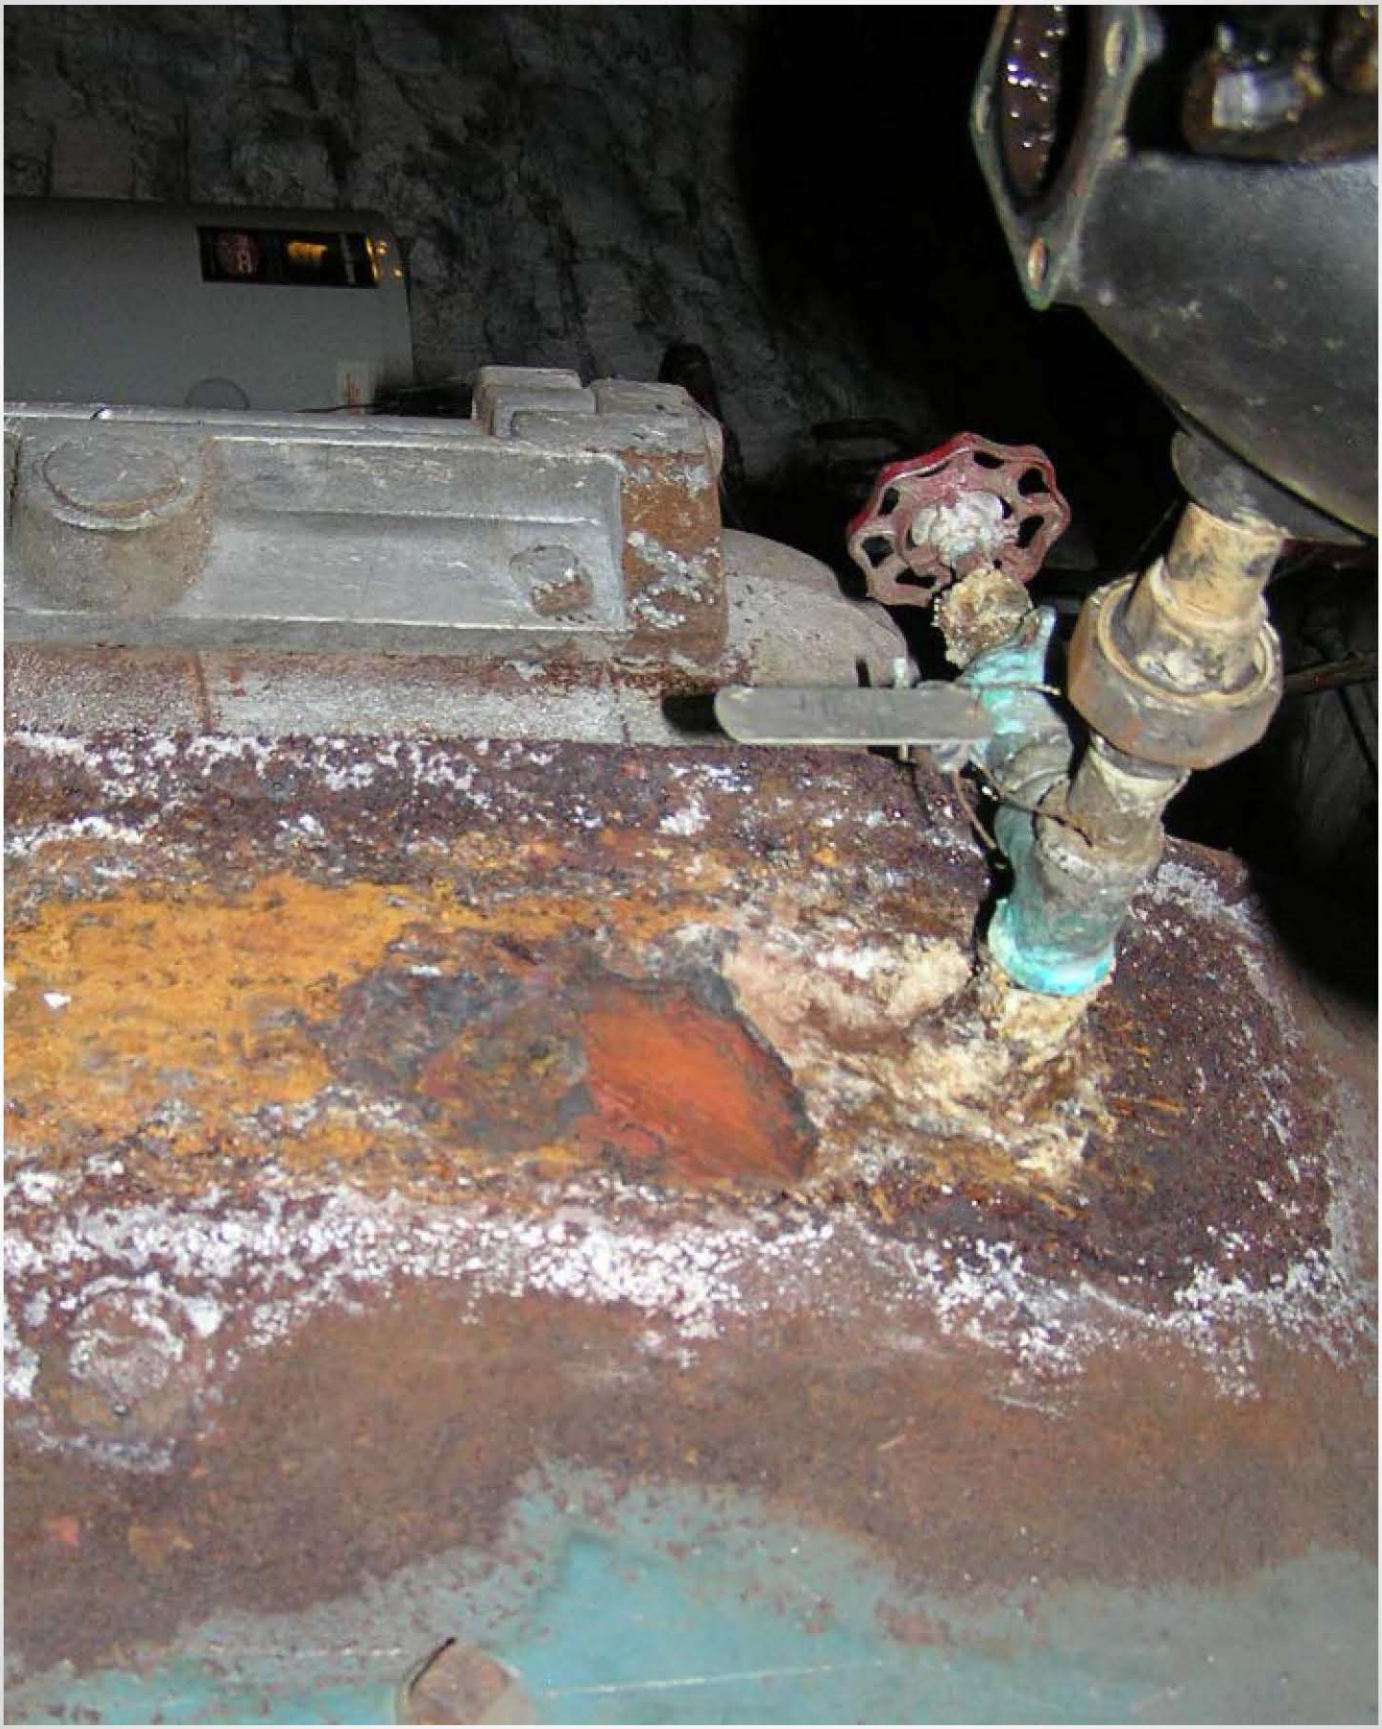

CAMU
FACTORY TEST

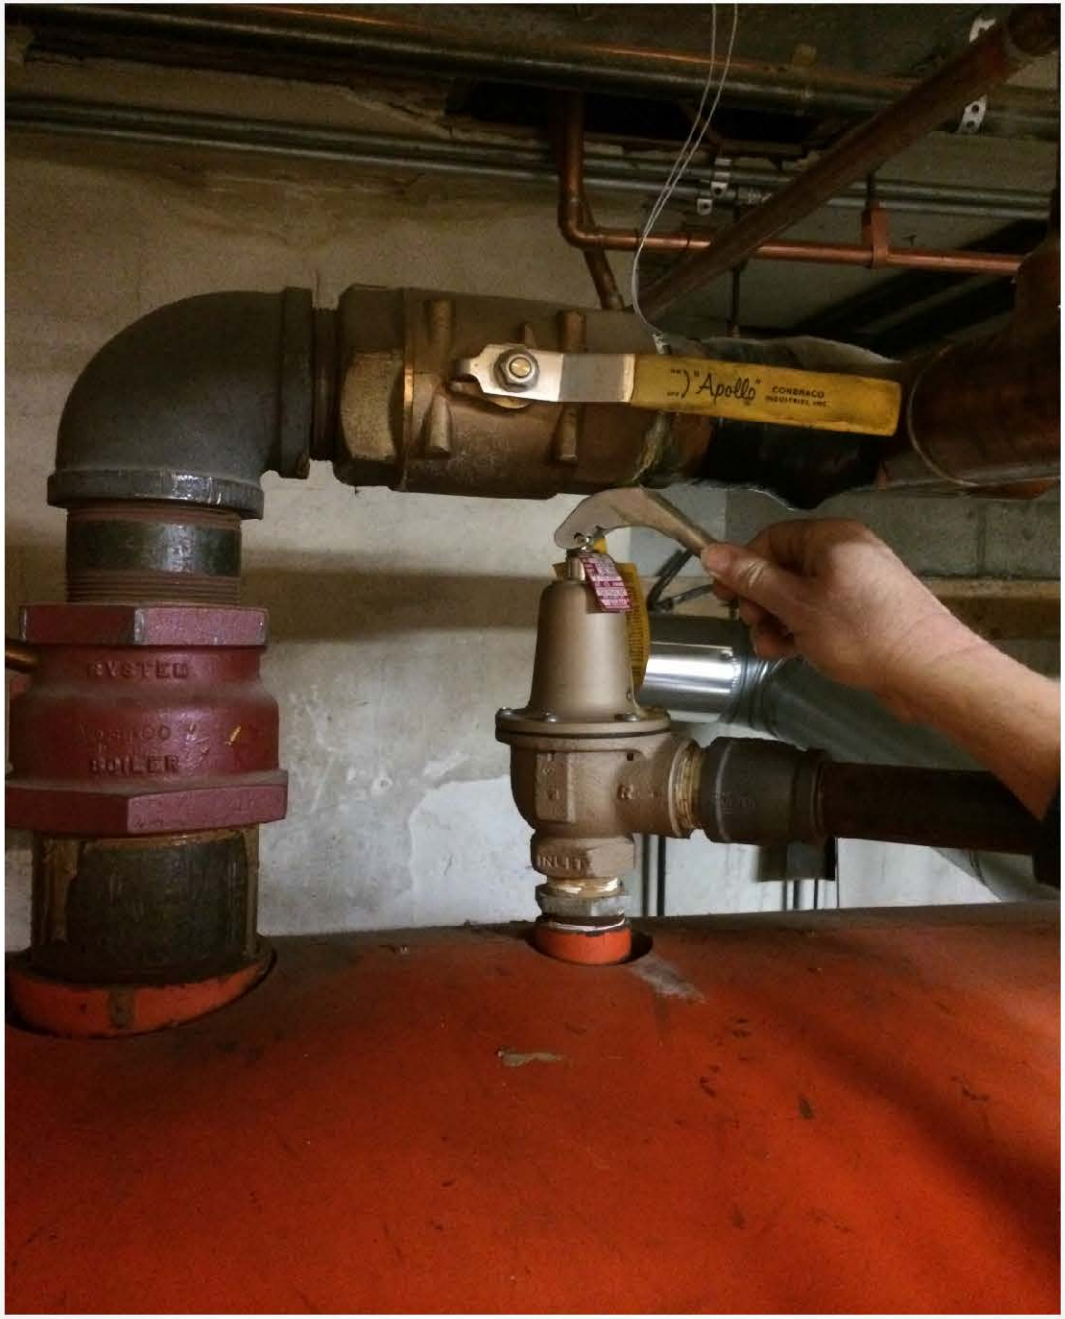
"Apollo"
CONBRACO
INLET

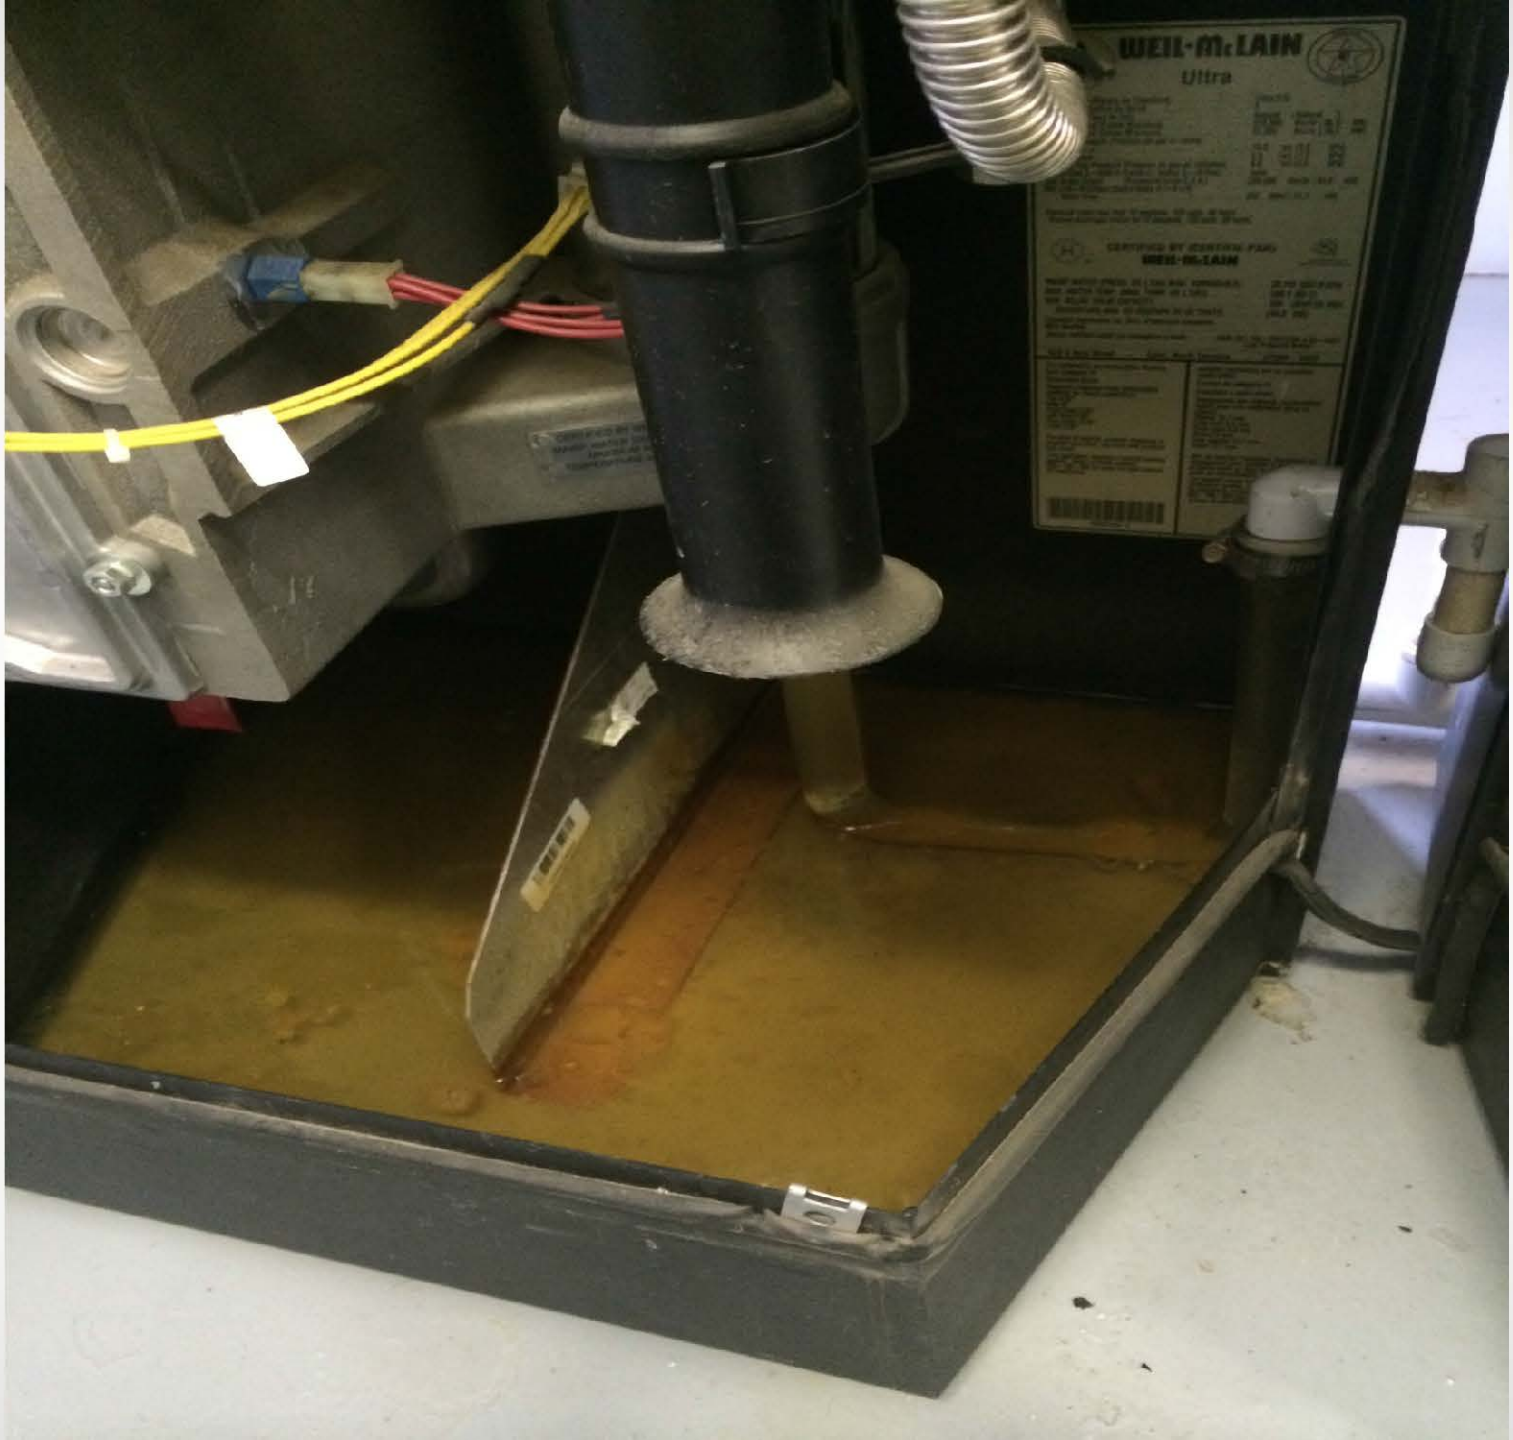
WEIL-McLAIN
Ultra

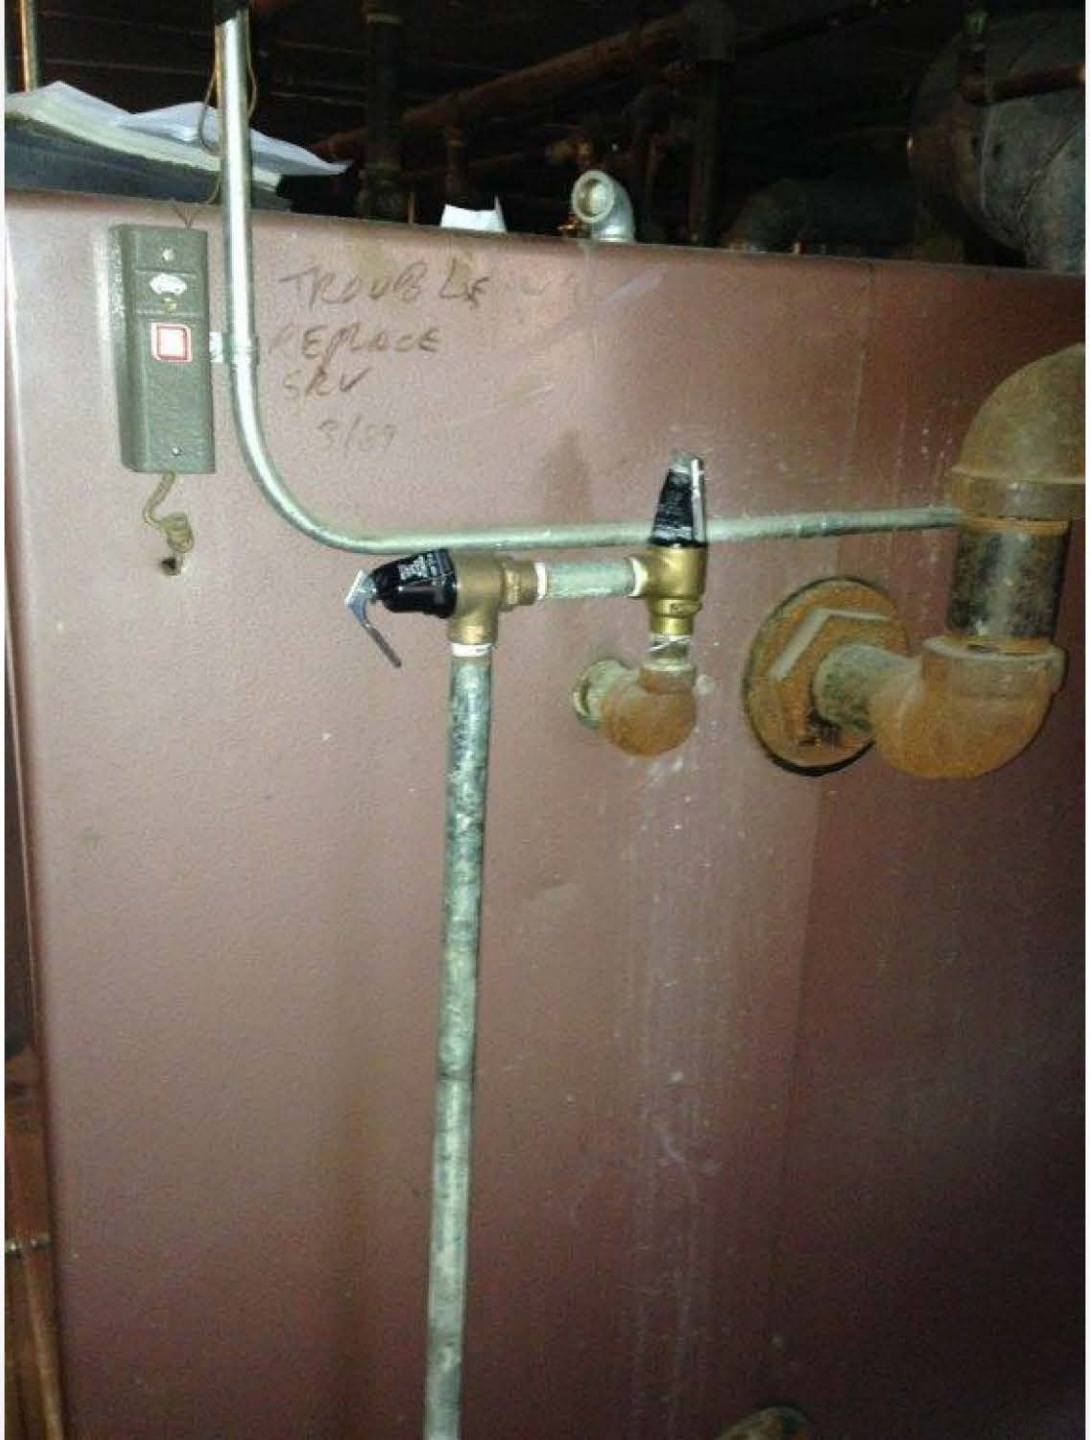
TROUBLE
REPLACE
SKV
3/09

Complies with Current Edition of
ASHRAE/IESNA Standard 90.1
RELIEF VALVE
INLET

STOCKHAM
USA

33 7/16"

SAFE MIN. WATER LI
VISIBLE PART OF
GAUGE GLASS

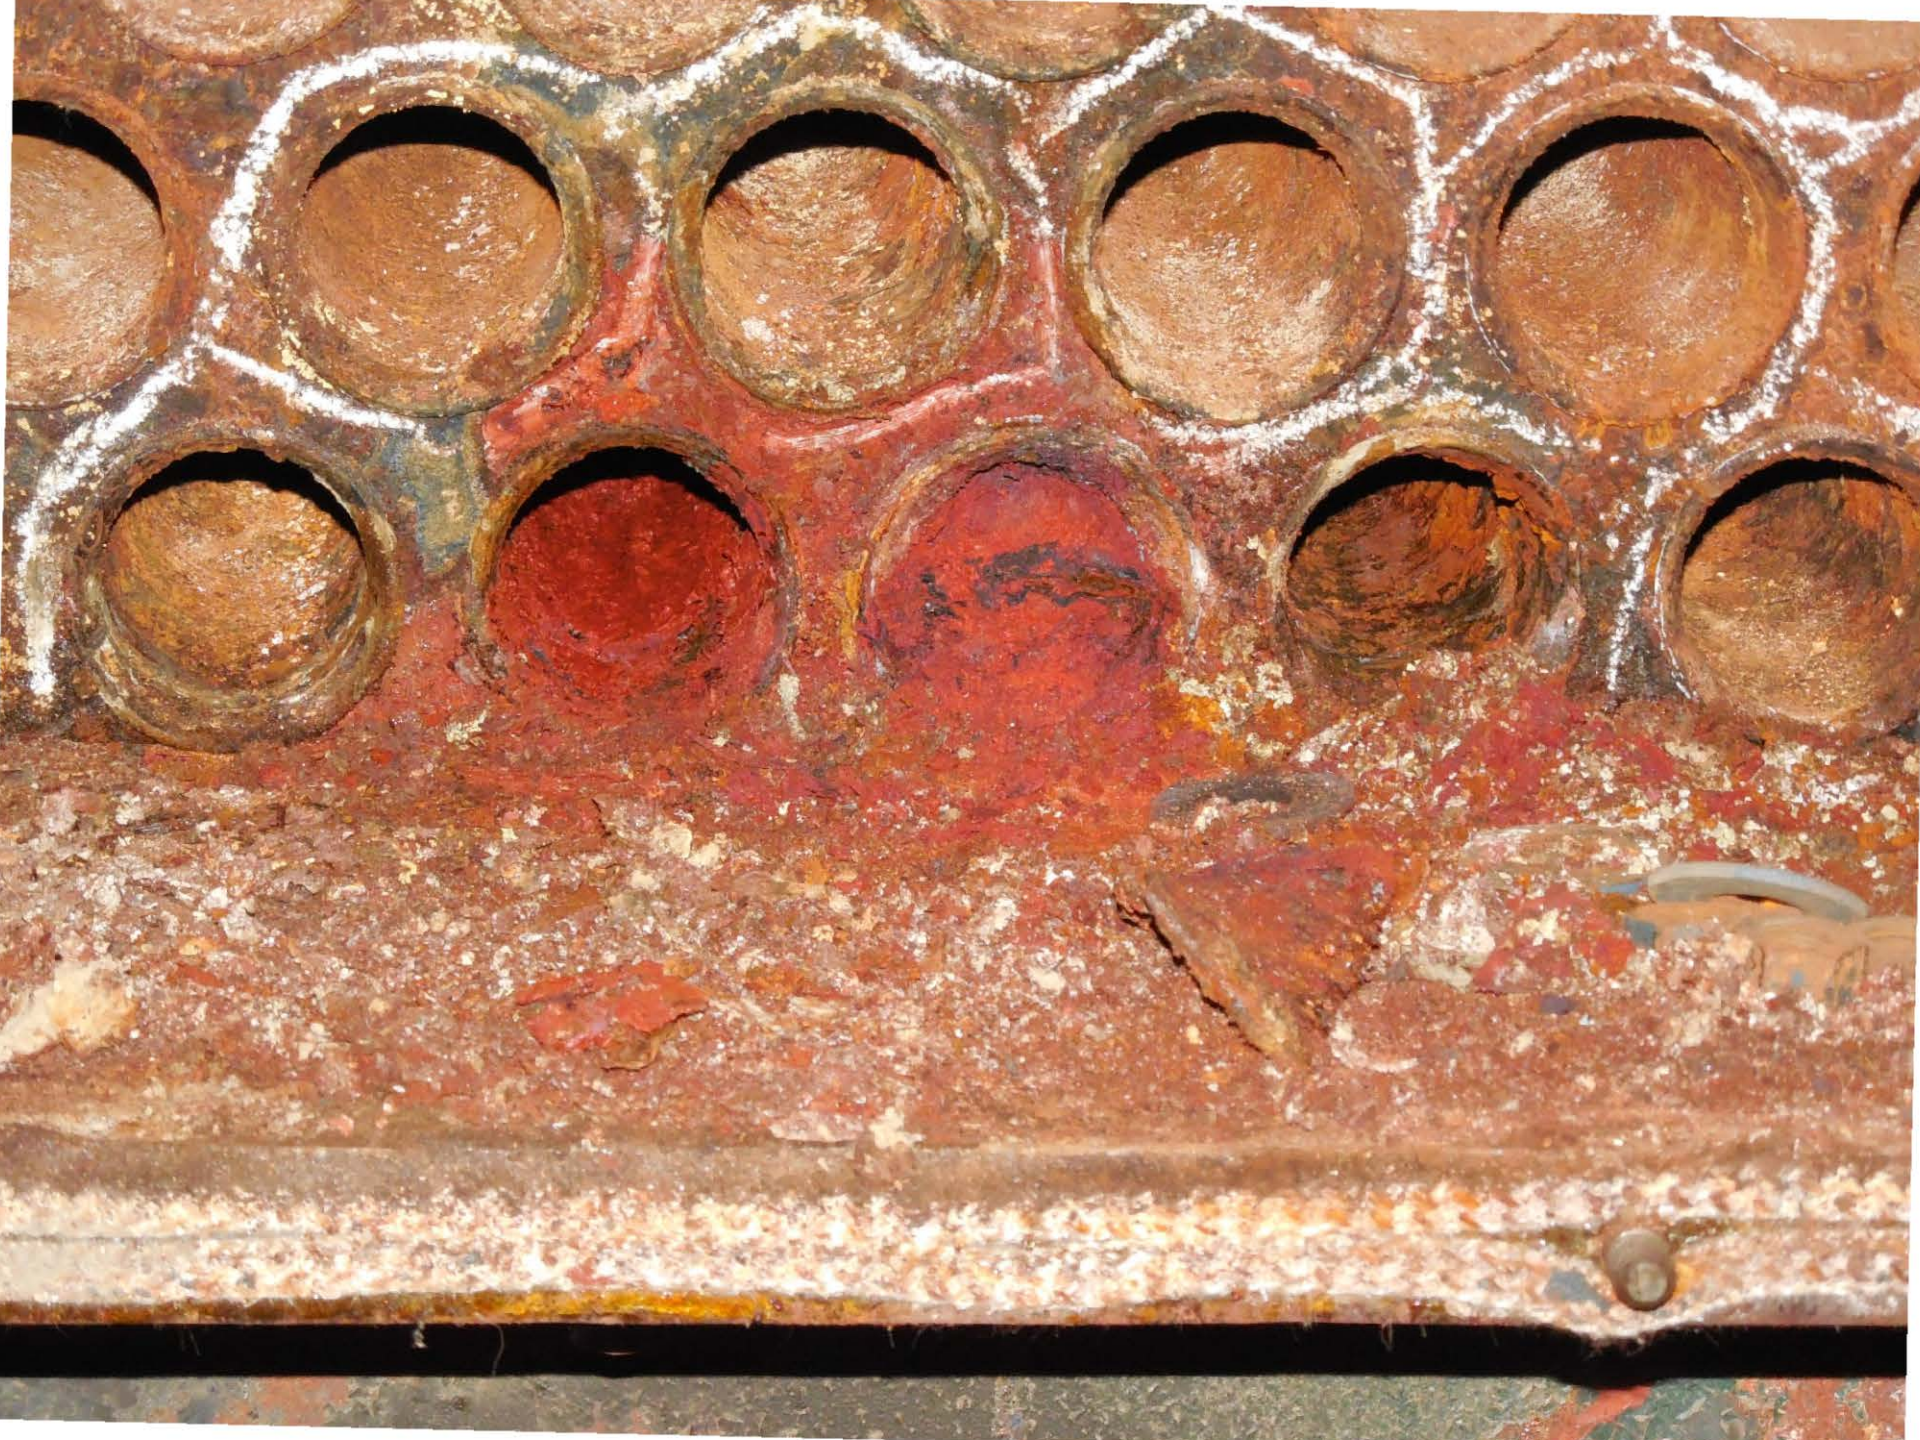

TOP

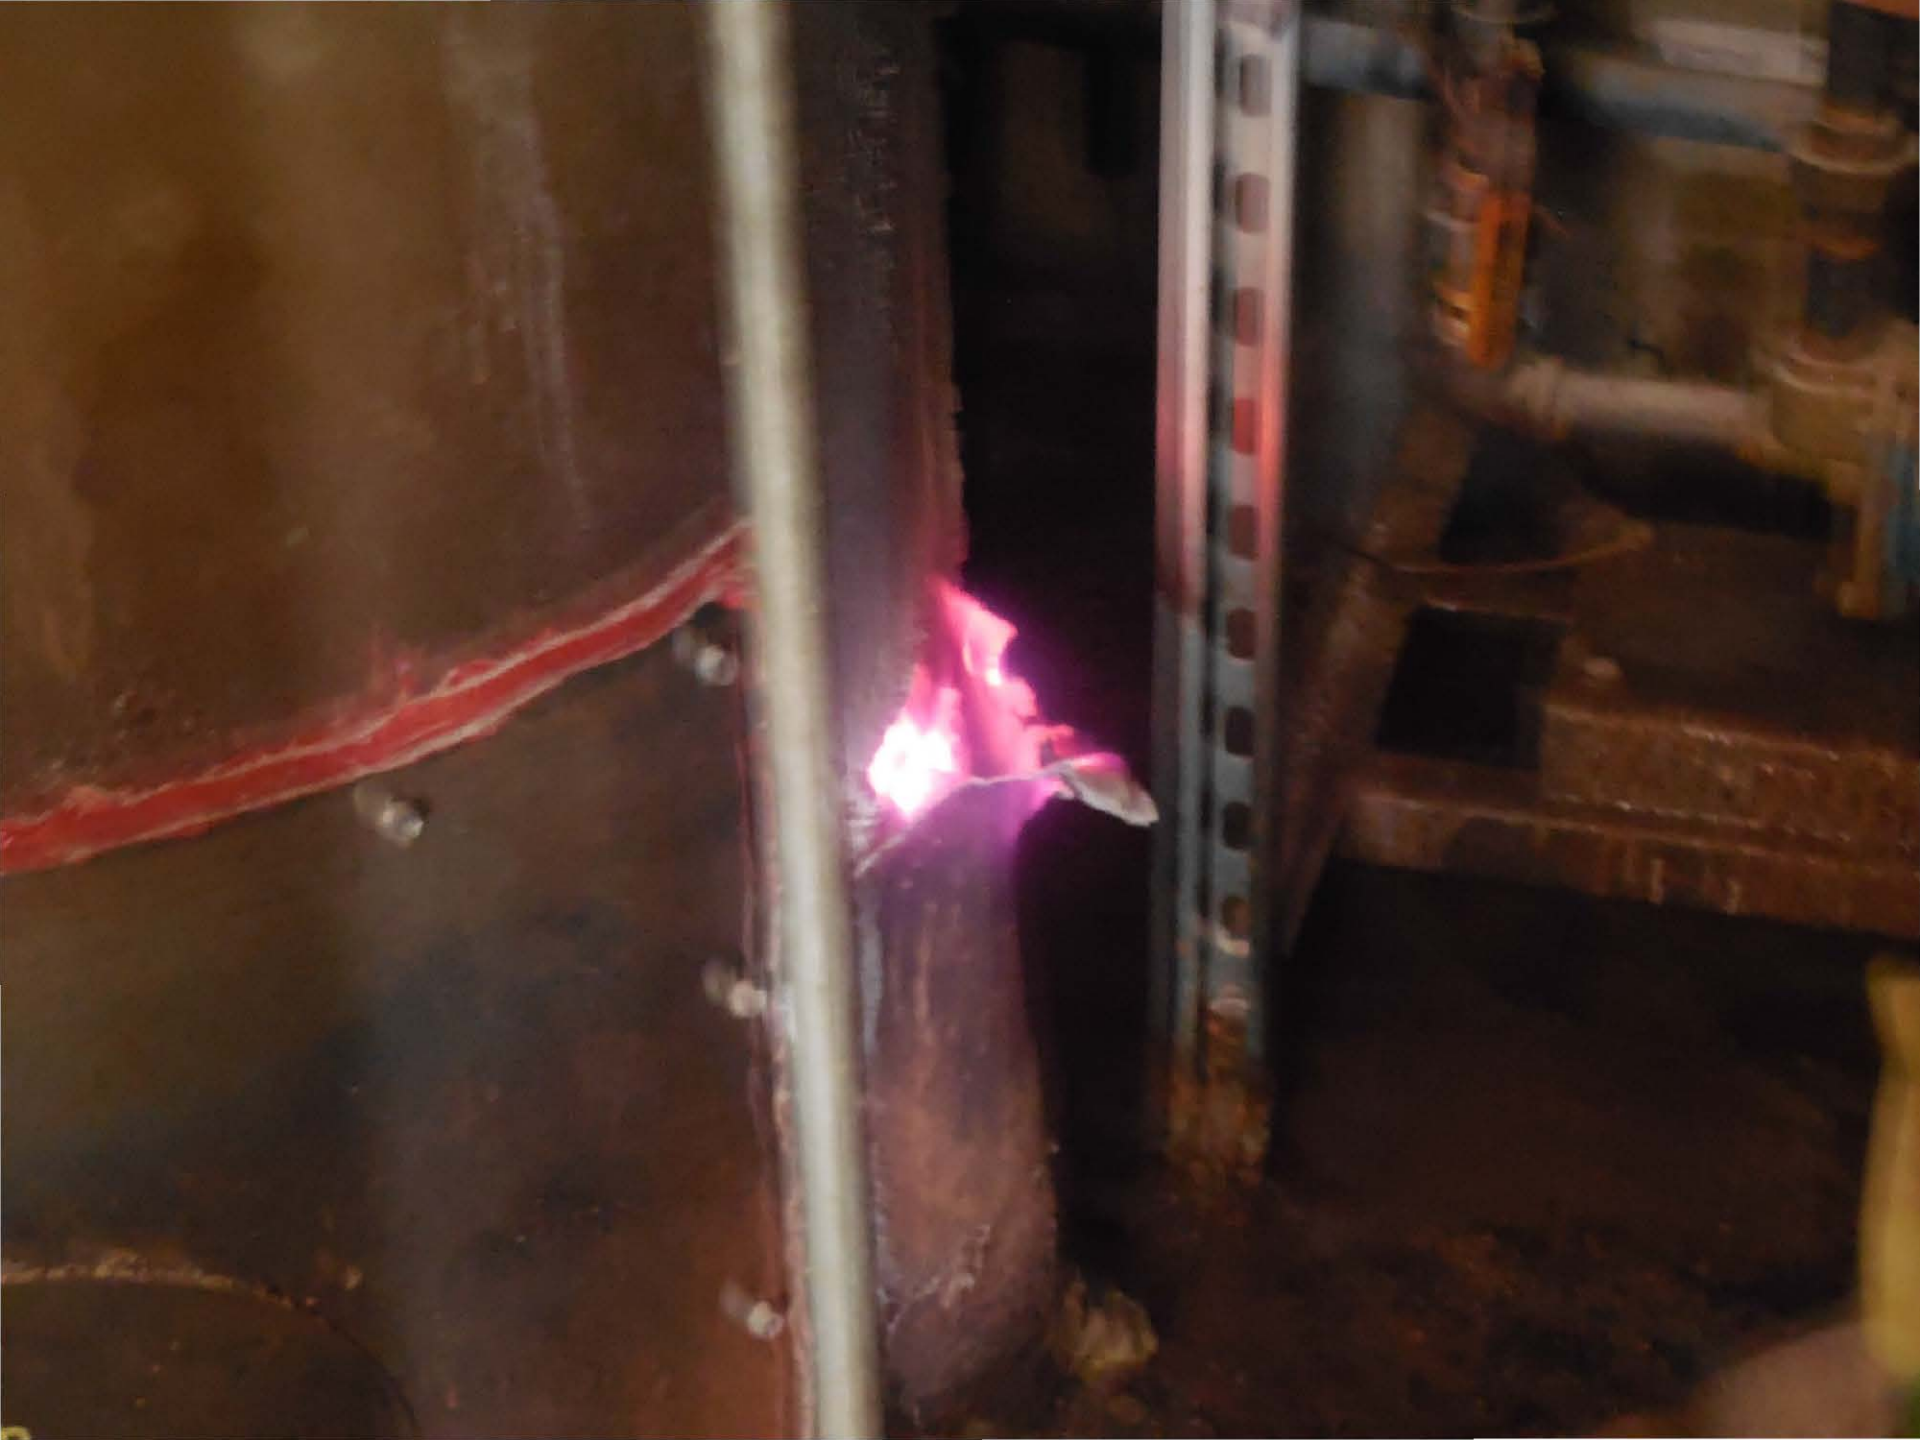

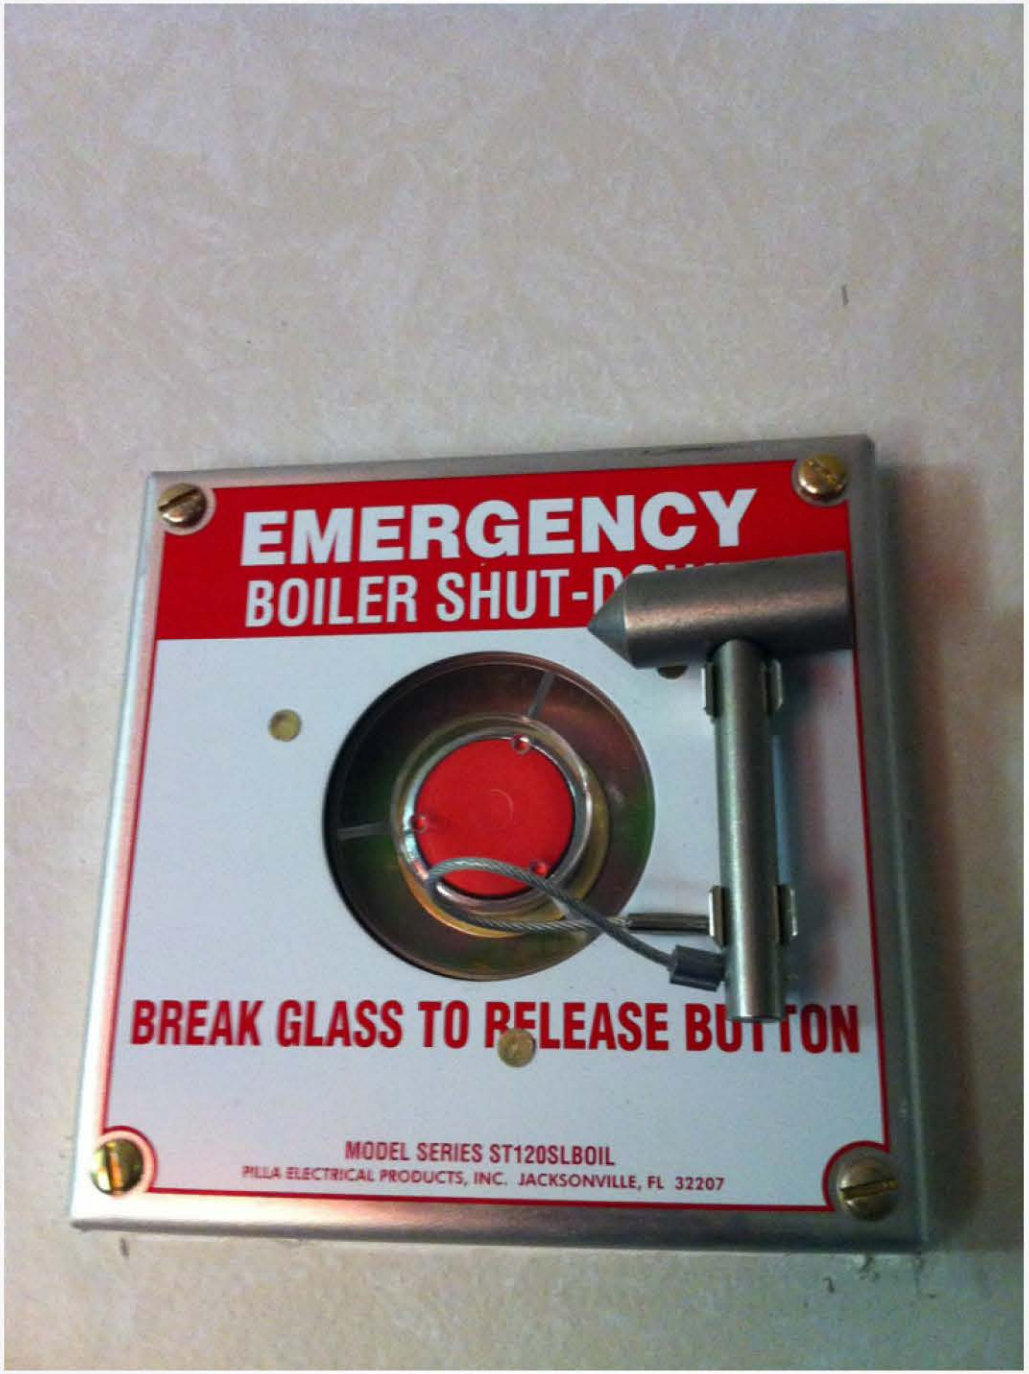
EMERGENCY
BOILER SHUT-D
BREAK GLASS TO RELEASE BUTTON
MODEL SERIES ST120SLBOIL
PILLA ELECTRICAL PRODUCTS, INC. JACKSONVILLE, FL 32207

THIS CH
REPLACE
DO
Drop
void y
CERTIFIED BY: SR
UM
W
MAWP 1.05 MPA AT 150°C
MDMT -10°C AT 1.05 MPA
MFRS SERIAL NO. UM136778
YEAR BUILT 2013

MPA to PSI

- Megapascal
- 1 MPA = 145.038 PSI
- 1.05 MPA = 152.289 PSI
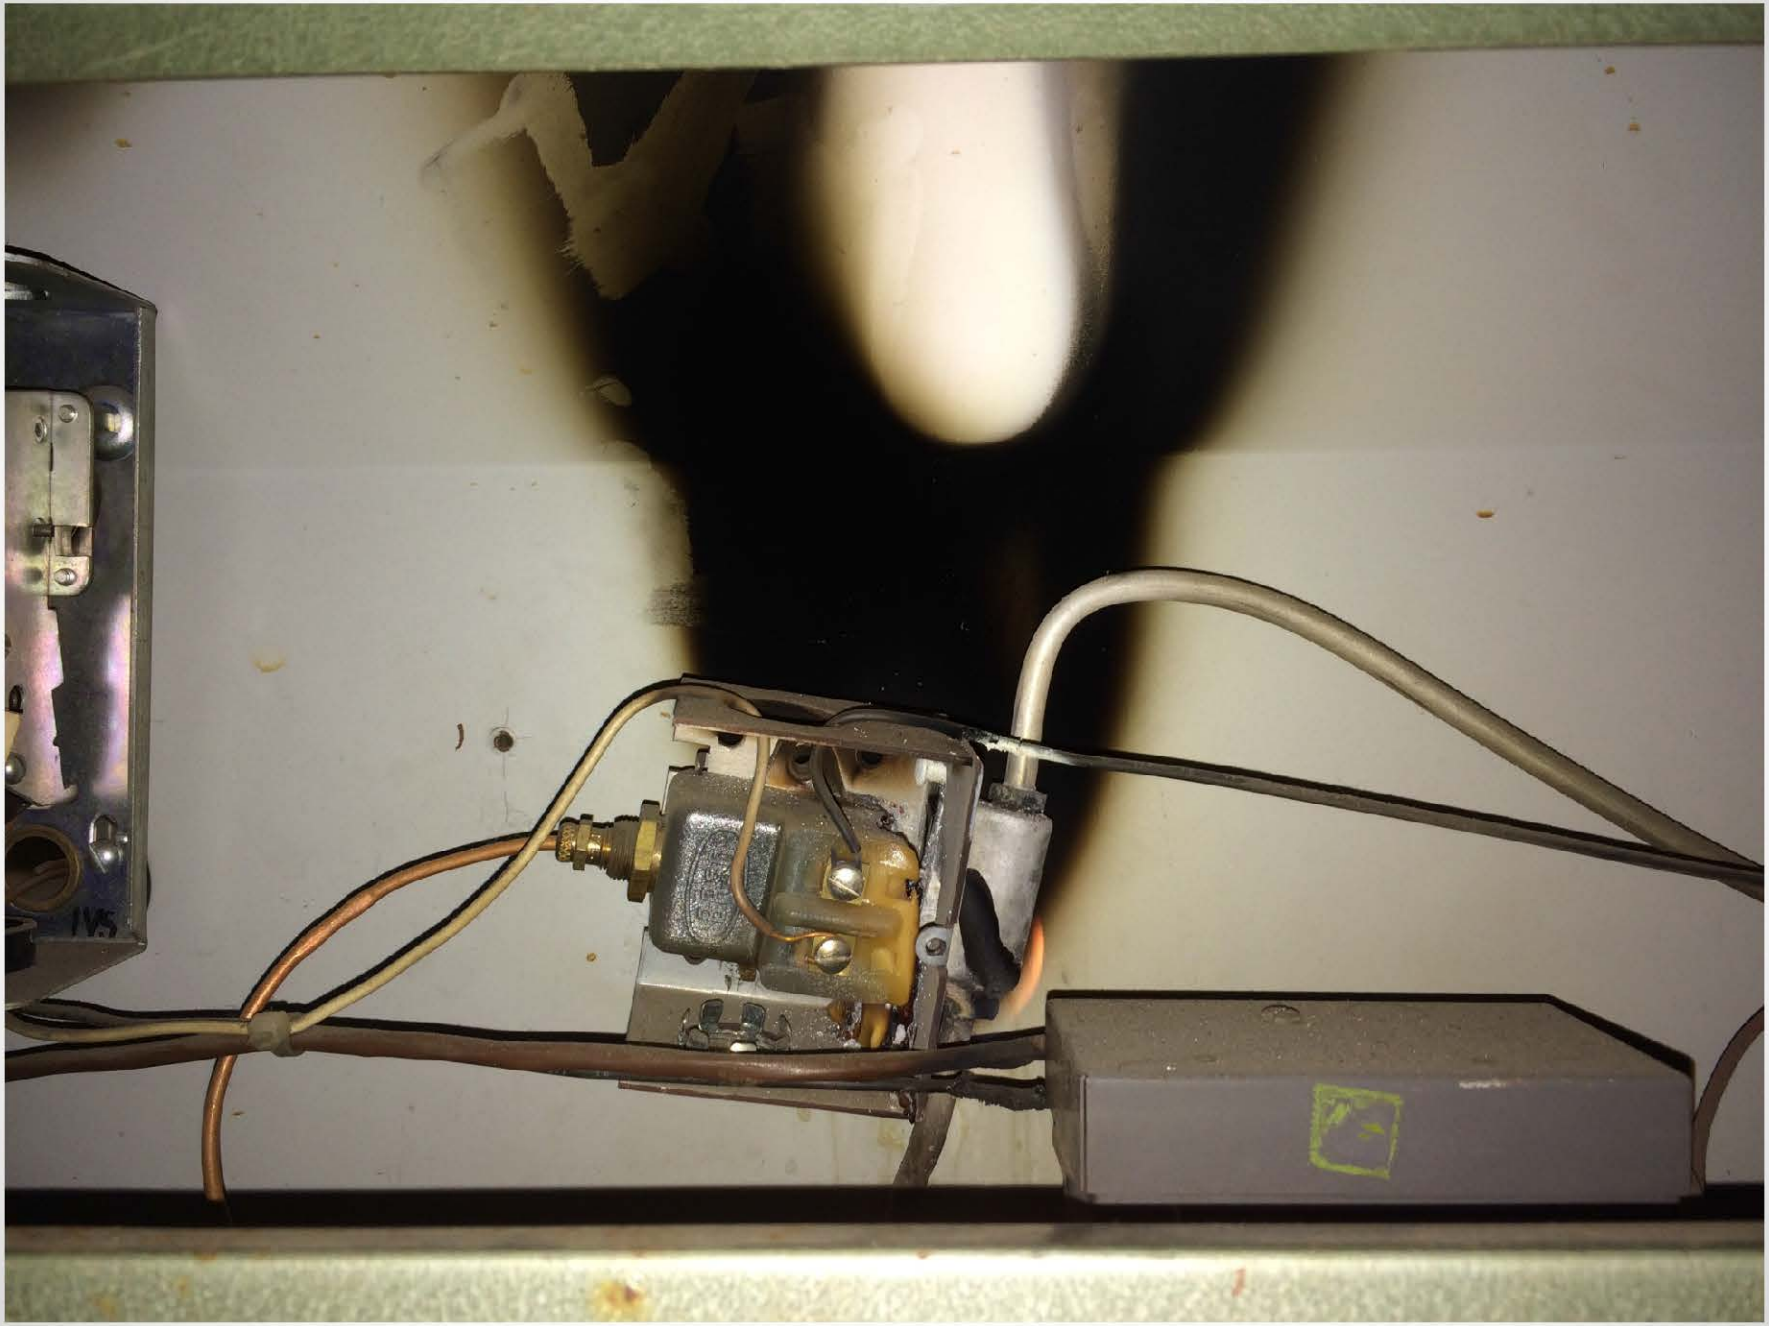
PROPANE